


Signaltermometer *)

13-14 Alarm
23-24 Utkobling

Normalinnstilling:

Temp.kl. A
Alarm 90° C
Utkobling 105° C

Temp.kl. B
Alarm 105° C
Utkobling 120° C

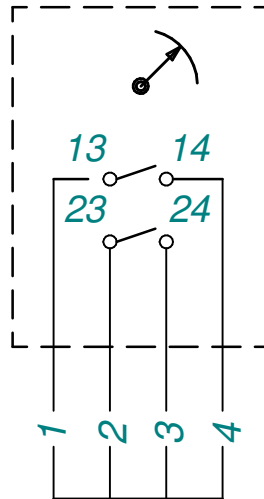

250 V, Max 5 A
(Type PMC 1071)

Rev. a: Signaltermometer, type AKM 44612, eller tilsvarende, f.eks. type PMC 1071. 18.11.2016 rb